



Contribution of Spatial Maps in Groundwater Potential Zones using Remote Sensing and Geographic Information System

Neelam Bunkar ^{a*}, R. K. Nema ^a and M. K. Awasthi ^a

^a *Department of Soil and Water Engineering, Jawaharlal Nehru Krishi Vishwavidyalaya, Jabalpur, (M.P) - 482004, India.*

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/IJECC/2022/v12i1030862

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/87592>

Original Research Article

Received 12 March 2022

Accepted 26 May 2022

Published 01 June 2022

ABSTRACT

Now a days, surface water resources are becoming insufficient to fulfil the water demand because utility enhanced as compare to availability. Therefore a systematic planning of groundwater improvement using modern technique is essential for the proper management and utilization of this valuable resource. Total annual supply will basically completed by major source that is groundwater. The manifesto of this paper is to identify the contribution of spatial map and their methodologies applied for acquiring groundwater potential zones of study area using remote sensing and GIS. The parameters that are used here for identifying their importance in controlling groundwater potential zones slope, drainage density, lineament density, geology, geomorphology, soil texture, land use land cover and rainfall. Vital importance of groundwater potential was to identification of appropriate locations for extraction of water. The remote sensing and GIS tool have a significant tool for land and water resource studies. The result demonstrated that integration of remote sensing and GIS tool with the detail information about the themes and their effect on the groundwater will assess the groundwater potential of study area.

Keywords: *Groundwater; groundwater potential; remote sensing; GIS; slope; drainage density; lineament density; geology; geomorphology; soil texture; land use land cover and rainfall.*

1. INTRODUCTION

Groundwater is one of the most important natural resource of the earth which is required for drinking, irrigation, industrialization purpose and economic development. In order to make certain sensible use of groundwater its proper assessment and management is required. Availability of groundwater depends upon presence of rock types and their properties (i.e., porosity, permeability, transmissibility and storage capacity). Depletion of groundwater depends upon the development activities of the area, continuous failure of rainfall, increasing demand and overexploitation of ground water. These problems could be sorted out to some extent by artificial recharge to the aquifers by construction of small water harvesting and recharge structures across streams. The main objective of artificial recharge is to provide sustainability to ground water by restoring supplies to aquifers depleted due to excessive draft and to enhance recharge to the aquifers lacking adequate natural recharge both in space and time.

“About 30% of the earth’s freshwater accounts by groundwater, whereas surface water resources from lakes and rivers accounts for less than 0.3% [1]. Demand for fresh water resources is constantly increasing day by day as a result of rapid industrialization and population growth. Therefore, groundwater extraction has become an integral part in many of the water management approaches.

Natural retrieval of ground water reservoir is a slow process and is often unable to keep pace with the excessive and continued exploitation of ground water resources in various parts of the country. This has resulted in declining ground water levels and depletion of ground water resources. Therefore planning and management of groundwater potential zones are necessary for future wellness. The groundwater mapping is essential for the exploration of unexploited ground water potential zones with appropriate limitations.

“In water resources studies remote sensing and GIS tools have opened new paths. Remote sensing and GIS provides multi-spectral, multi-temporal and multi-sensor data of the earth’s surface for analysis of various objectives such as groundwater study, management etc.” [2]. “One of the greatest advantages of using geoinformatics for hydrological investigations and

monitoring is its ability to generate information in spatial and temporal domain, which is very important for useful analysis, prediction and validation” [3].

GIS integrates the information from several sources in such a way that it all has the same scale. Often, GIS must also manipulate the data because different maps have their different projections. A projection in the GIS is the method of transferring information from earth’s surface to a flat piece of paper or computer screen. No projection can copy the reality of Earth’s curved surface exactly. Different types of projections fulfil this task in several ways, but all result in some distortion. GIS takes data from maps that were made using different projections and combines them so all the information can be displayed using one common projection system. Geoinformatics technology have become a crucial tool in water studies due to their capability in developing spatio-temporal information and effectiveness in spatial data analysis and prediction.

2. MATERIALS AND METHODS

The Tons sub-basin lies between 23° 57' 53.98" and 25° 10' 09.15" N latitude and 80° 21' 35.03" and 82° 43' 25.41" E longitudes. It basically covers five district of Madhya Pradesh such as Rewa, Satna, Eastern part of Panna and Northern part of Sidhi and Katni district. It is also bounded on north and east by Uttar Pradesh state. The geographical area of Tons basin is 12497 sq. km. The map of study area is shown in following Fig.1.

2.1 Data Product used in the Study

Data Requirement:

1. Toposheet
2. Digital Elevation model (DEM)
3. Satellite data
4. Rainfall data
5. Geology map
6. Geomorphology map
7. Lineament map
8. Soil map

Toposheet (1:50000) will be acquired from the Survey of India 'Nakshe' portal having URL: <https://soinakshe.uk.gov.in>. Shuttle Radar Topography Mission (SRTM) Digital elevation model (DEM) 30m*30m resolution data used for delineation of watershed, slope, drainage and

drainage-density of study area. Shuttle Radar Topography Mission (SRTM) DEM having a spatial resolution of 30m*30m will be acquired from the USGS Earth Explorer. Sentinel 2B imagery with spatial resolution of 10m*10m will be downloaded from USGS Earth Explorer for preparation of land use land cover map. The map containing information about the geology, geomorphology and lineament of the study will

be gathered from the website of 'Bhukosh' (i.e.Integrated Spatial Data Management Portal). Soil map will be acquired from Soil Atlas of Madhya Pradesh generated by National Bureau of Soil Survey and Land Use Planning (NBSSLUP). Daily rainfall data in gridded format (0.25°x0.25°) will be procured from India Meteorological Department (IMD).

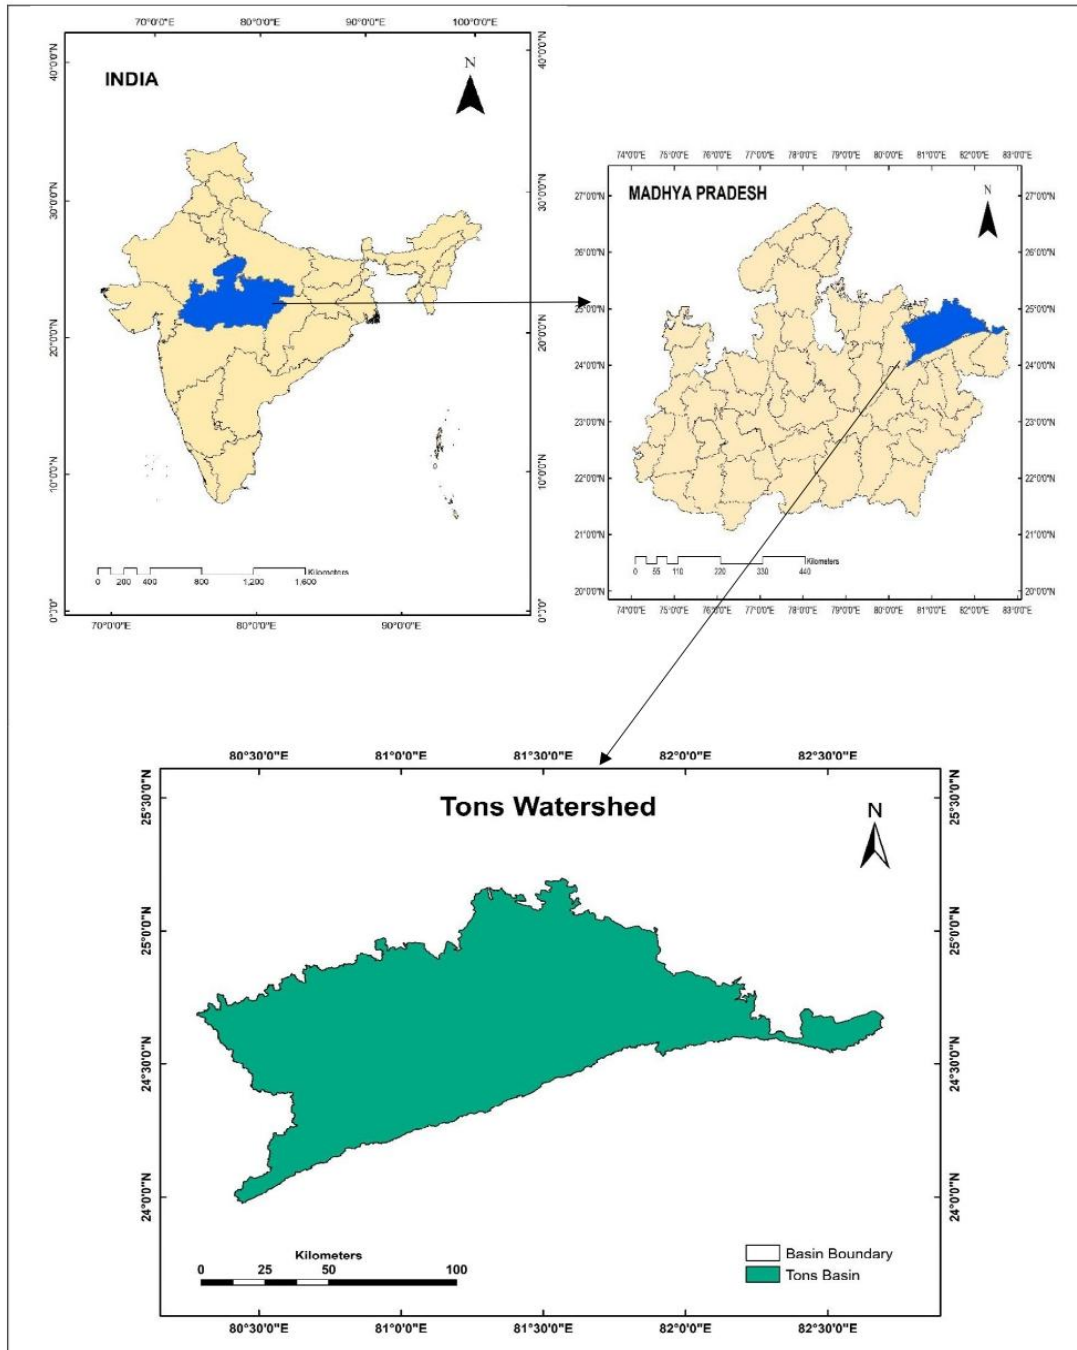


Fig. 1. Location map of study area

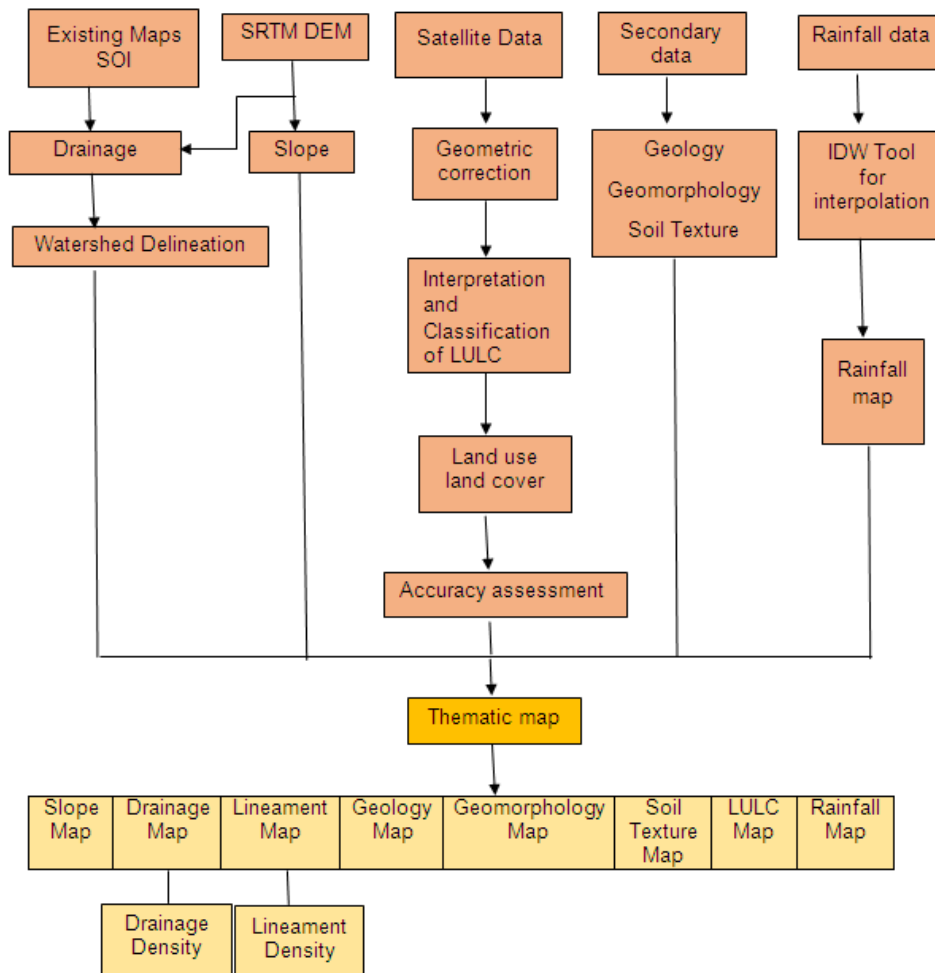


Fig. 2. Flow chart of methodology of preparation of thematic maps

2.2 Methodology

Software's such as ArcGIS® 9.3, Erdas Imagine 2014 and also open source software GOOGLE EARTH in true sense were used for preparation of different spatial maps. ArcGIS® 9.3 software was used for creating map, compiling the geographic information, analyzing mapped information, and discover and share the information. This software provided an infrastructure for creating maps and collect geographic information throughout an organization, across a community, and openly on the Web.

ERDAS Imagine 2014 software was used for image processing that allows users to process both geospatial and other imagery as well as vector data. ERDAS can also handle hyper spectral imagery from various sensors. This software is integrated within other GIS and

remote sensing applications and the storage format for the imagery can be read and process in many other applications (*.img files).

To prepare base map of study area mosaiced SOI toposheets were used. Outlet point of the basin chosen by using contour and drainage line available on the topographic map. Outlet point of study area were selected and verified with the help of topography map. Using the GIS based software ArcGIS® 9.3 (Slope tool in the spatial analysis tool), the slope map of the study area is generated. With the help of the soil information of the basin and referring the soil map by National Bureau of Soil Survey and Land Use Planning (NBSS&LUP), Government of India. Soils are classified as per the soil conservation service soil classification system. This information was then transferred onto the base map for preparation of soil map of study area. Sentinel 2B imagery with spatial resolution of 10m*10m will be used for

preparation of LULC. SRTM DEM 30m*30m resolution data used for preparation of slope and drainage-density of the study area. Geology, geomorphology and lineament information of the study area will be gathered from the website of 'Bhukosh'. Rainfall map was prepared by using daily rainfall data in gridded format (0.25°x0.25°) were procured from India Meteorological Department (IMD).

3. RESULTS AND DISCUSSION

Eight different thematic maps and their interpretation discussed regarding groundwater potential of Tons basin which covering five district of Madhya Pradesh viz. Rewa, Satna, Katni, Panna and Sidhi.

3.1 Slope

Topographic data information plays the vital role for the determination of elevation of groundwater Table [4]. For the identification of Groundwater potential zones, the slope angle was considered as an important input as it has considerable influence in the study area [5]. The slope of study area has been calculated in percentage based on SRTM data. The slope map was derived from a SRTM data of the study area. Fig. 3 shows the slope map of Tons basin. The slope of the Tons basin were varied between 0 to 84 %. As we know that infiltration and surface water runoff basically depends on the slope. Slope is a vital factor for assessment of groundwater potential zone. Water tends to store in lower topographical region rather than higher topographical region. If there is higher the elevation lesser will be groundwater potential as well as groundwater recharge and vice versa. Hence it is a suitable indicator of groundwater prospectus suitability. Slope category of Tons basin classified in Table 1.

3.2 Drainage Density map

Drainage map was prepared by using DEM data acquired from the USGS Earth Explorer by using

ArcGIS® 9.3 Software. Drainage pattern reflects the characteristic of surface as well as subsurface formation. Drainage density (in terms of km/km²) indicates closeness of spacing of channels as well as the nature of surface material. More the drainage density, higher would be runoff. Thus, the drainage density characterizes the runoff in the area or in other words, the quantum of relative rainwater that could have infiltrated. Hence lesser the drainage density, higher is the probability of recharge or potential groundwater zone.

In the present study, since the drainage density can indirectly indicate the groundwater potential of the area due to its relation to surface runoff and permeability, it was considered as one of the indicators of groundwater occurrence. Drainage density measurements have been made for the Tons basin. Accordingly classes have been assigned 'very low' 'low' 'moderate' 'high' and 'very high' categories. Fig. 4 shows the drainage map of the Tons basin.

3.3 Lineament Density map

"Lineaments are structurally controlled linear or curvilinear feature. It can be identified from the satellite imagery by their relatively alignments" [6,7]. "Lineaments represent the zones of faulting and fracturing resulting in increased secondary porosity and permeability. These factors are hydro-geologically very important as they provide the path ways for groundwater movement. Lineament density of an area can indirectly reveal the groundwater potential, since the presence of lineaments usually denotes a permeable zone. Areas with high lineament density are good for groundwater potential zones" [8]. Lineaments density map of study area has been prepared using krigging interpolation technique of ArcGIS® 9.3 software. The lineament density map of the study area is shown in Fig. 5 and it revealed that the lineament density in the study area range from 0-19 Km/Km².

Table 1. Slope category of Tons Basin

S. No.	Slope category	Slope percentage
1	Very low	0-12
2	Low	13-23
3	Moderate	24-33
4	High	34-49
5	Very high	50-84

3.4 Geology map

Geology map was prepared by using data procured from the Bhuvan at scale of 1:250000. Geology of study area comprised mainly of Rewa GP, Kaimur GP, Bhandar GP, Semi GP and Malwa GP. The Semi GP is the oldest class of the Vindhyan SGP. Vindhyan comprise of sand stone, shale and limestone. Sand-Stone and Shale are hard, compact forming poor aquifers, Limestone has secondary permeability. Deccan Traps comprises fractured, weathered, vesicular and joint units of Basalts makes moderate to good aquifers, this type units makes most important aquifers of the region. The map of the Tons basin is shown on Fig. 6.

3.5 Soil-Texture map

Soils are the resultant product of weathering of parent rocks caused by difference in temperature and hydration effect, [9]. Type of soil play an important role on the amount of water that can be resist in the subsurface formation and hence influences the groundwater potential zoning and groundwater recharging. Rate of infiltration of water will be mainly affected by the different type of soil texture and rate of hydraulic conductivity (HC). Fig. 7 depict the soil texture map of tons basin. The detail of soil texture categories identified in the basin as per the scheme of National Bureau of Soil Survey (NBSS) and Land Use Planning (LUP).

3.6 Geomorphology map

“Evaluation of surface and ground water resources vitally influences by the geomorphic features. The following geomorphological features such as active flood plain, active quarry, anthropogenic terrain, highly dissected structural hills and valleys, low dissected denudational hills and valleys, low dissected structural lower plateau, moderately dissected denudational hills and valleys, moderately dissected denudational lower plateau, moderately dissected structural hills and valleys, moderately dissected structural lower plateau, older alluvial plain, pediment Piedi plain complex and piedmont slope are identified from the study area. Active valley fill, and buried pediment is good sources of groundwater whereas structural hills, pediment zone and gullied land are poor recharge zones”. Different features of geomorphology are shown in Fig. 8.

3.7 Land Use Land Cover Map

Land use refers to man’s activities in land, various uses which are carried out on land, whereas land cover denotes the natural vegetation, water bodies, rock/soil, artificial cover, and others resulted due to land transformation. The remote sensing data records the information essentially on land surface from which the information on land use has to be inferred. Identified land use/land cover features from the satellite imageries of the study area are water bodies, Agricultural land, Forest (Open forest, dense forest, evergreen forest), Open land, Barren land/wasteland (land with scrub and land without scrub), built-up land or habitation (Private or unplanned land).

The sentinel 2B satellite image has been used to find out the land use and land cover of study area. The unsupervised classification method has been used with level of classification. The result of land use land cover of the study area to be covered by six different categories such as water bodies, built up land, barren/waste land, forest, open land and agricultural land. Result of analysis is mentioned in Table 2 which depict that most of the portion of study area 5513.10 km² comes under agricultural land. Cultivated land are basically very inconvenient that results in poor groundwater potential. Basically forest region covers 1863.67 km² of study area, which may have good potential and recharge capacity of groundwater. In the same manner water bodies covers basically 658.89 km² which is very indicator of groundwater potential zones and groundwater recharge capacity [16-19]. Groundwater potential is very poor in the habitation areas because it may be cover by private and unplanned holding; which accounts for 328.37 km² of study area. Most of the habitation or urban settlement covering in city area of Satna and Rewa district. Fig. 9 shows the land use land cover map of Tons basin.

3.8 Rainfall Map

Rainfall is the major and important water source in the hydrological cycle and here it’s a most dominant influencing factor for the groundwater in the study area. The annual rainfall data is taken from the Indian Meteorological Department (IMD) for annual rainfall measurement. For the present study, the rainfall data of 2019 have been considered

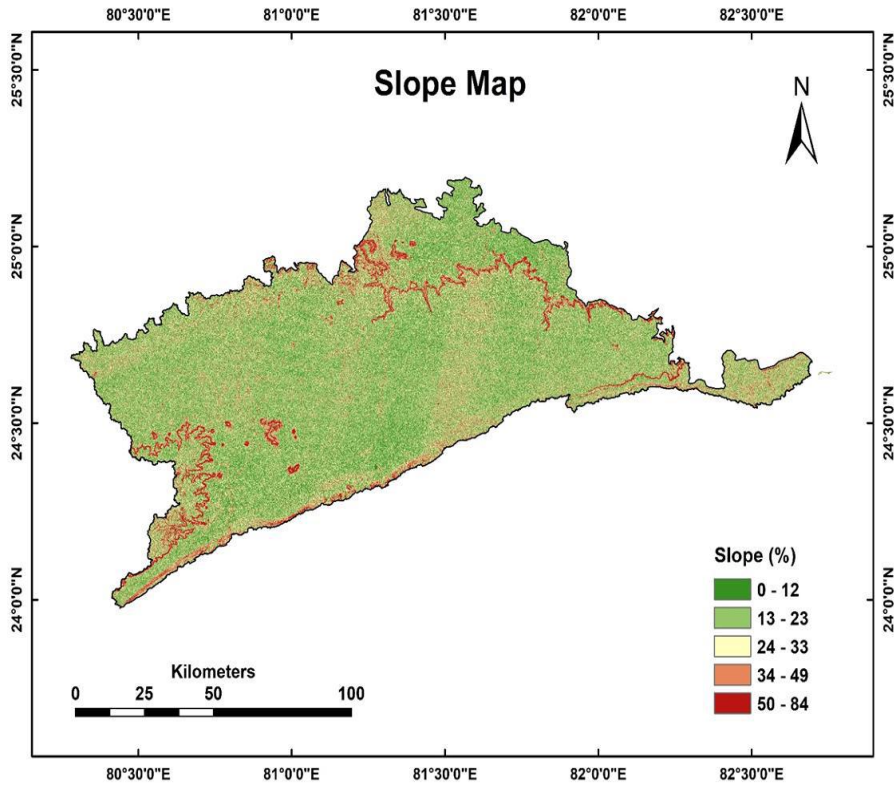


Fig. 3. Slope map of study area

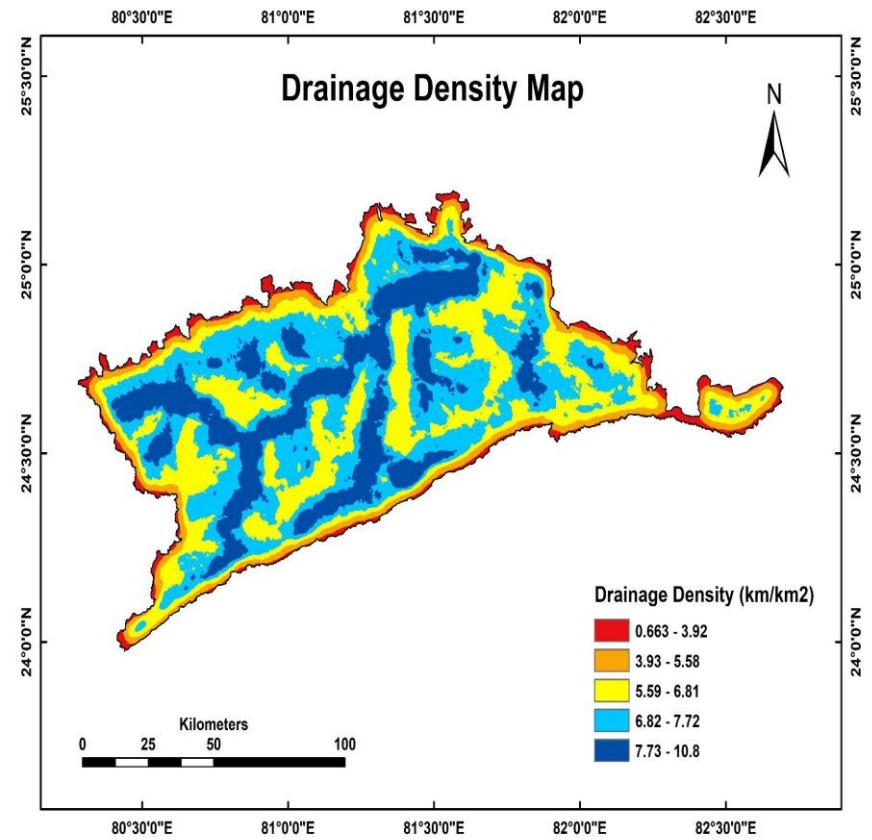


Fig. 4. Drainage Density map of study area

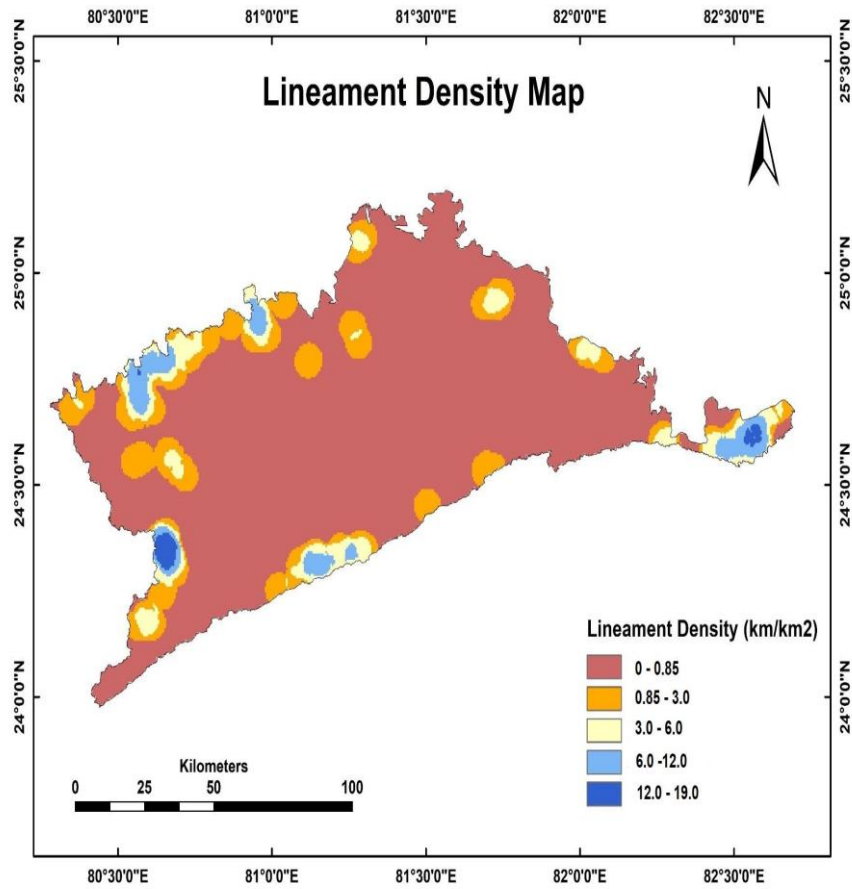


Fig. 5. Lineament density of study area

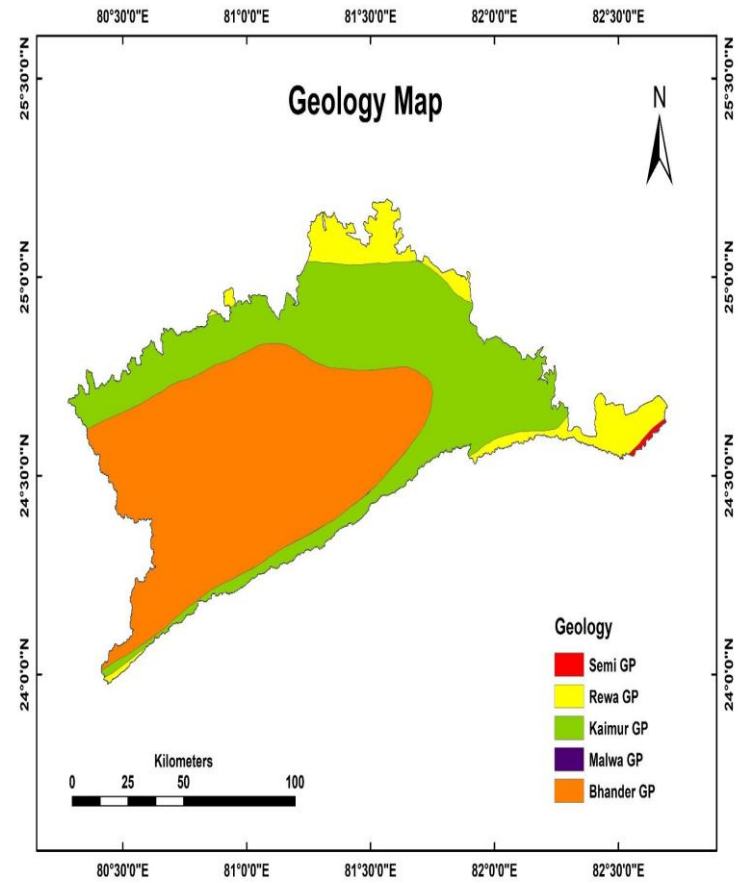


Fig. 6. Geology map of study area

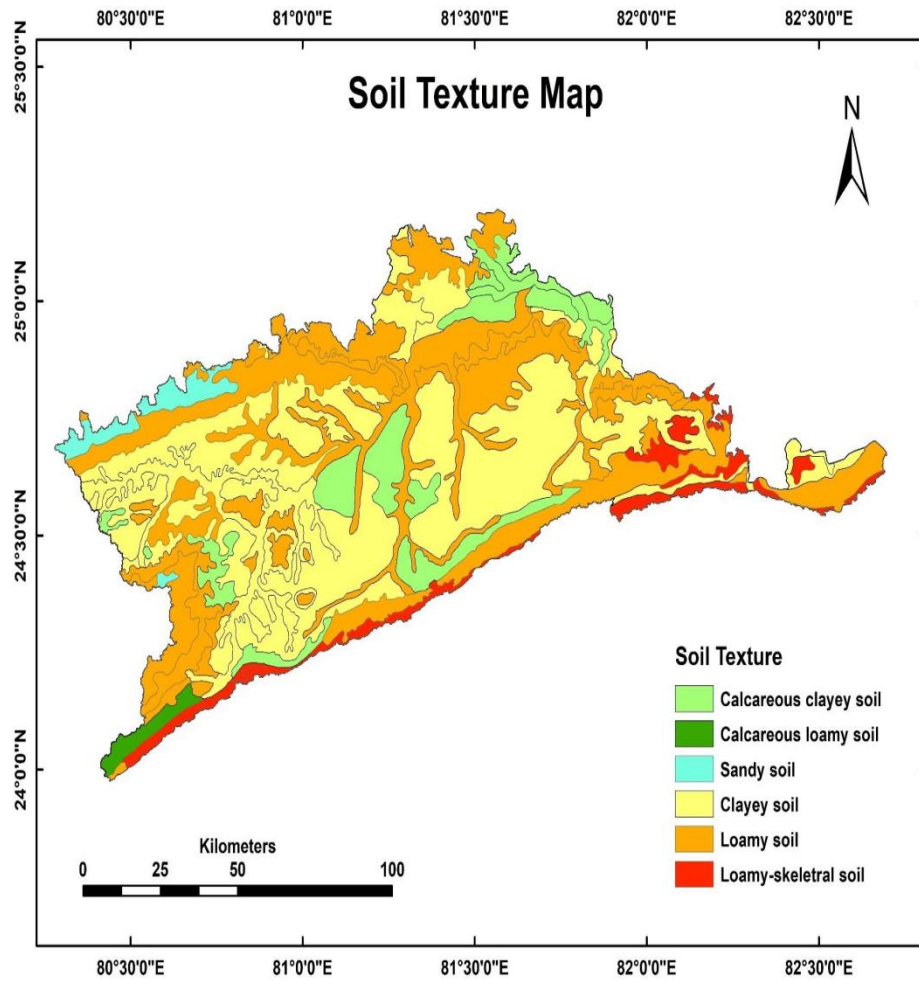


Fig. 7. Soil texture map of study area

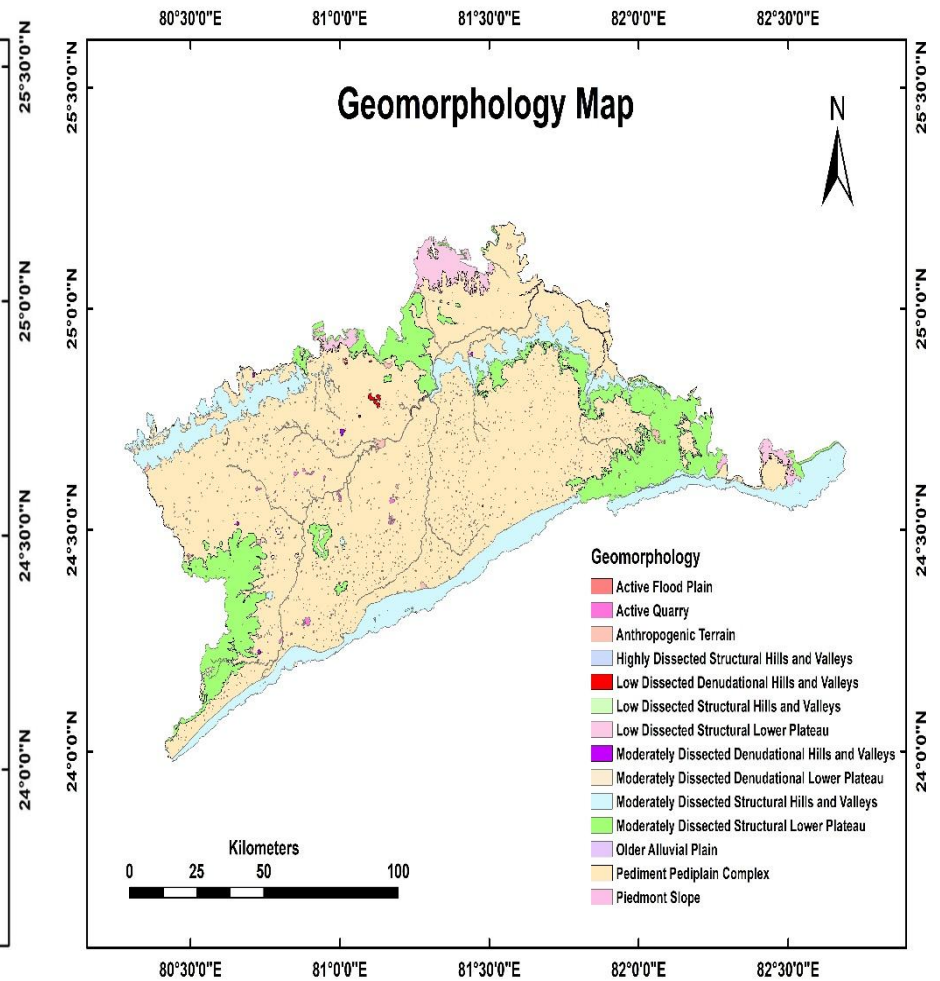


Fig. 8. Geomorphology map of study area

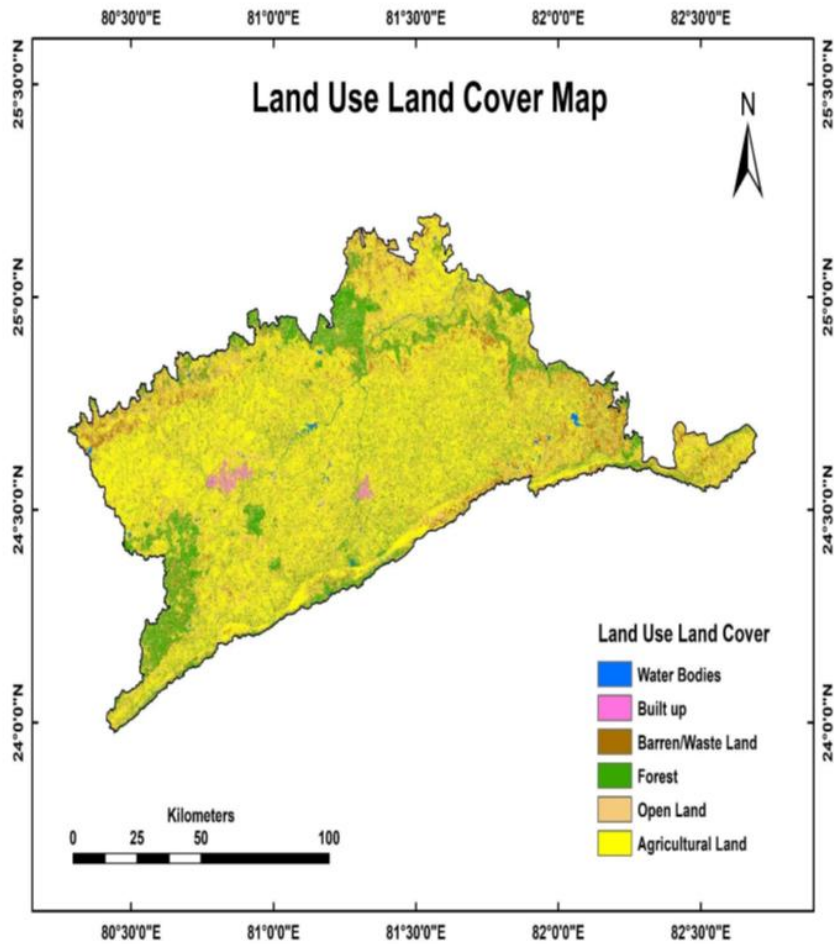


Fig. 9. Land use land cover map of study area

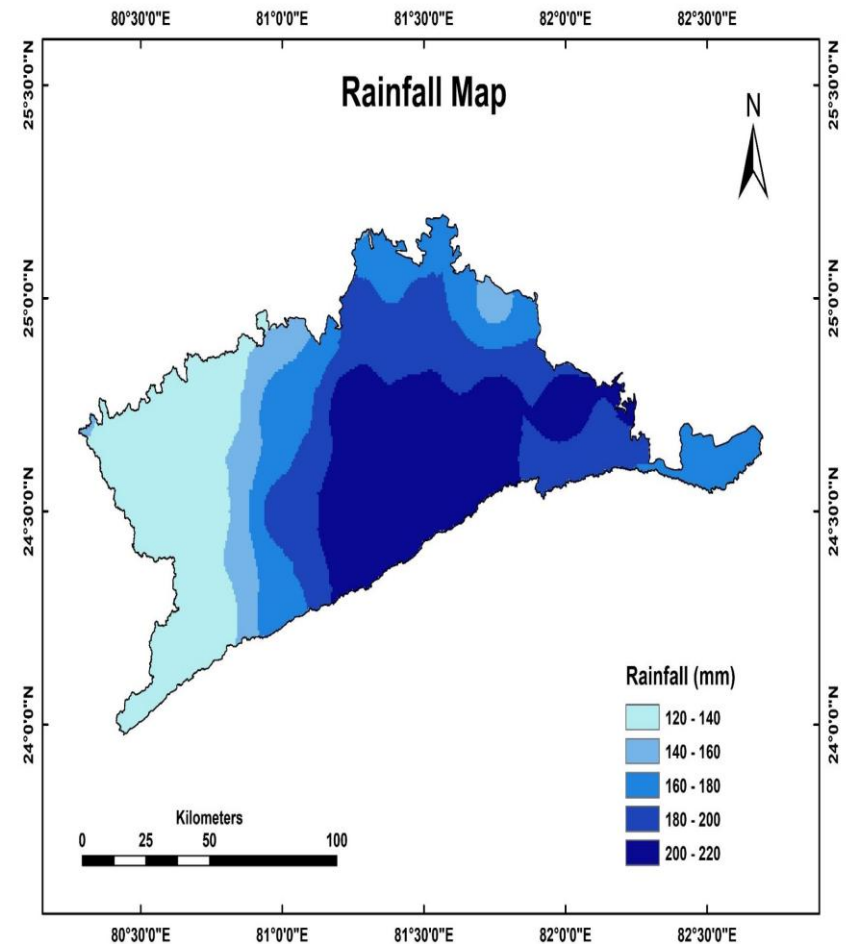


Fig. 10. Rainfall map of study area

Table 2. Land use land cover of study area

S. No.	Classes	Area covered(km ²)
1.	Water Bodies	654.89
2.	Agricultural Land	5513.10
3.	Forest	1863.67
4.	Open land	2951.51
5.	Barren land/Waste land	1169.91
6.	Builtup land	328.379

for the study. In the study annual rainfall ranges from 120 to 220 mm respectively (Fig. 10). Inverse distance weighing (IDW) interpolation method were used to prepare spatial distribution map of rainfall which inbuilt in ArcGIS@9.3 tool [19-21].

4. CONCLUSION

Remote sensing and GIS provide the information which are not accessible and difficult to analyse. For procuring information such as any area, objects or phenomenon without having any physical contact and also access information of inaccessible areas, remote sensing is there to provide it whereas it is very effective and time saving. Whereas, GIS is a tool used for mapping and analysing feature and event carrying in the earth. Groundwater potential zone vitally used for development and systematic utilisation of groundwater in the needed areas.

DISCLAIMER

The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Shiklomanov I. World fresh water resources P.H. Gleick (Ed.), Water in Crisis: A Guide to the World's Fresh Water Resources, Oxford University Press, New York; 1993.
- Chowdhary VM, Rao NH and Sarma PBS. GIS-based decision support system for groundwater assessment in large irrigation project areas. Agricultural Water Management. 2003;62:229–252.
- Sarma B, Saraf AK. Study of Landuse - Groundwater relationship using an integrated remote sensing and GIS approach. Map Asia; 2002. Available:<http://www.gisdevelopment.net>
- Sener E, Davraz A, Ozcelik M. An integration of GIS and remote sensing in groundwater investigations: a case study in Burdur, Turkey. Hydrological Journal. 2005;13:826–834.
- Bhunja GS, Samanta S, Pal DK and Pal B. Assessment of groundwater potential zone in Paschim Medinipur District, West Bengal—a meso-scale study using GIS and remote sensing approach. Journal of Environmental Earth Sciences. 2012;5(2):41–59.
- Nampak H, Pradhan B, Manap MA. Application of GIS based data driven evidential belief function model to predict groundwater potential zonation. Journal of Hydrology. 2014;513:283-300.
- Nag SK and Kundu A. A delineation of groundwater potential zone in hard rock terrain in kashipur block purulia district, west Bengal, using geospatial techniques. International Journal of Water Resource. 2016;6:1-7.
- Haridas VR, Aravindan S, Girish G. Remote sensing and its applications for groundwater favourable area identification. Quarterly Journal of GARC. 1998;6:18-22.
- Kumar SP, Balasundareshwaran A, Kumaraswamy K and Balaselvakumar S. Assessment of Groundwater Potential Zones in Dindigul District, Tamil Nadu, using GIS-Based on Analytical Hierarchical Process (AHP) Technique. International Journal of Recent Scientific Research, 2017;8(12):22684-22690.
- Cunningham WL and Daniel CC. Investigation of ground-water availability and quality in Orange County, North Carolina. U.S. GEOLOGICAL SURVEY

- Water-Resources Investigations Report. 2001; 00–4286:1-52.
11. Duan H, Deng Z, Deng F and Wang D. Assessment of Groundwater Potential Based on Multicriteria Decision Making Model and Decision Tree Algorithms Hindawi Publishing Corporation Mathematical Problems in Engineering Volume; 2016. Article ID 2064575, 1-11.
 12. Etikala B, Golla V, Li P, and Renati S. Deciphering groundwater potential zones using MIF technique and GIS: A study from Tirupati area, Chittoor District, Andhra Pradesh, India. Hydro Research. 2019; 1:1–7.
 13. Hutti B, Nijagunappa R. Development of groundwater potential zone in North-Karnataka semi-arid region using geoinformatics technology. Universe Journal of Environmental Research and Technology. 2011;1(4):500–514.
 14. Hussein AA, Govindu V, Nigusse A and Gebre M. Evaluation of groundwater potential using geospatial techniques. Applied Water Science. 2016;7:2447–2461.
 15. Jha MK and Peiffer S. Applications of remote sensing and GIS technologies in groundwater hydrology: Past, present and future. Bayreuth Centre of Ecology and Environmental Research. 2006;112.
 16. Mogaji KA, Aboyeji OS and Omosuyi GO. Mapping of lineaments for groundwater targeting in the basement complex region of Ondo State, Nigeria, using remote sensing and geographic information system (GIS) techniques. International Journal of Water Resources and Environmental Engineering. 2011;3(7): 150-160.
 17. Rajaveni SP, Brindha P and Elango L. Geological and geomorphological controls on groundwater occurrence in a hard rock region. Applied Water Science. 2017;7: 1377–1389.
 18. Rasoulzadeh A and Moosavi SAA. Study of Groundwater Recharge in the Vicinity of Tashk Lake Area. Iranian Journal of Science & Technology. 2007;31(B5):509-521.
 19. Srivastava VK. Water Resources Management through Remote Sensing and GIS: A Case Study of Dhanbad Watershed. Proceeding of National Seminar on Geoinformatics held at Coimbatore. 2000;238-243.
 20. Thapa R, Gupta S, Guin S and Kaur H. Assessment of groundwater potential zones using multi-influencing factor (MIF) and GIS: a case study from Birbhum district, West Bengal Applied Water Science. 2017;7:4117–4131.
 21. Yeh HF, Cheng YS, Lin HI and Lee CH. Mapping groundwater recharge potential zone using a GIS approach in Hualian River, Taiwan. Sustainable Environmental Research. 2016;26(1):33–43.

© 2022 Bunkar et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/87592>